

Network Engineering - Racks-PDU-Eficiencia Energetica

Network Engineering España S.L.

Racks Cooper NR Network Rack



Network Rack (NR) is a configurable rack range, ready for changes, without weldings, which main difference with Delta3 is its steel frame. NR has 2 rack ranges available: Active and Standard.

NETWORK ACTIVE

Network Active, with front vented door and double rear vented door, both 77%, suited for active equipment.






NETWORK STANDARD

Network Standard, with front glass door and blank metal rear door, suited for data cabling.



NR MAIN SPECIFICATIONS

Its main features are: Bolted frame, not welded. CR4 Steel sheet 1,5 and 2 mm thick. Painted. Useble load 800 kg (static) y 225 kg (dynamic) 2 x pairs rack rails 19" depth adjustable, bith front and rear. Configurable roof top panels, with 2 slots to install from many available. Adjustable height jacks.

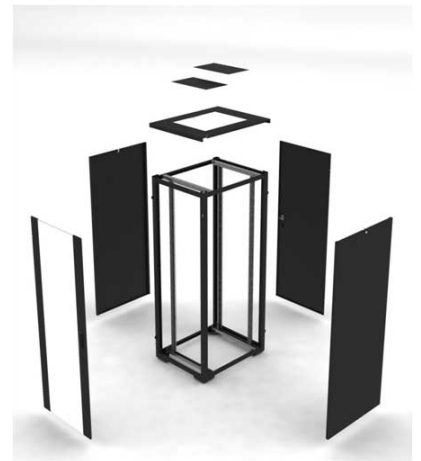

Roof configurability, showing both closed or 1 opened.

Cabling side rails.

Rack rails configurability, both depth & width.